

EV DC to DC Converter

MODEL VDD152S360-14

1.5KW




Electric vehicles normally use low voltage service batteries (12, 24, 48VDC) to supply the board instrumentation. The easier system to charge and aid the board battery is to connect in parallel a power supply with an appropriate output voltage. The biggest power source on the vehicles are normally the traction batteries with an higher voltage, so we have to reduce an high DC voltage to a lower DC voltage. This is the VDD152S360-14 DC/DC converter object.

The VDD152S360-14 DC/DC Converter is suitable for all electric powered vehicles and is designed to be fitted on-board the vehicle and connected permanently to the battery. This fully encapsulated converter deliver a stable isolated high power, low voltage DC supply for accessories such as lights, horns, and wipers. This eliminated inefficient battery taps and fragile, expensive high voltage accessories.

Key Features

- High Frequency: silent operation
- Output power: 1500W
- Protection from short circuit, overload and reverse polarity
- Fully isolated
- IP67 protection
- CAN-bus communication
- Integrated fuse holder
- Power status indicator

Product Photo

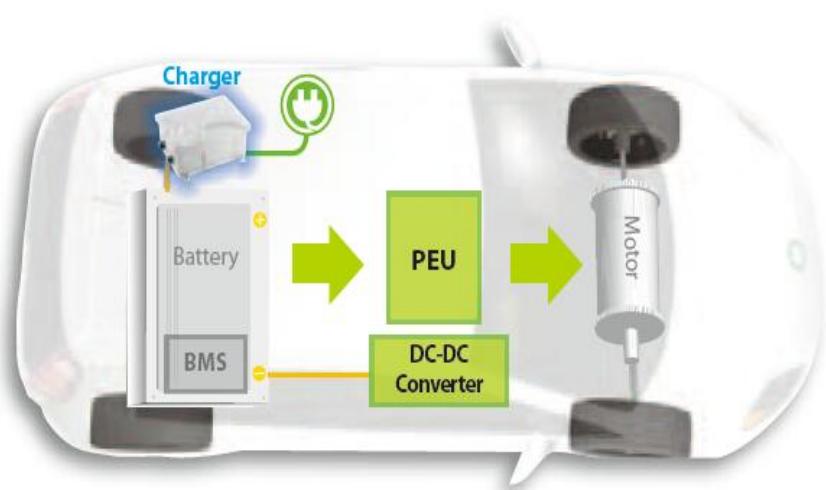

Item	Specifications
Output	
Output Power	1.5KW
Nominal Voltage Range	12Vdc
Output Current	0-108A
Peak Power	1.8KW
Input	
Operating Input Range	200-420Vdc
Maximum Input Current	5.5A
Frequency Range	50/60Hz
Efficiency	≥ 94%
Mechanical	
Cooling	Air-cooling
Dimension	272x175x94mm; 10.7x6.9x3.7"
Weight	2kg; 4.4lbs
Operating Temperature	-40~60°C
Operating Ambient Temperature	-40~75°C
Storage Temperature	-40~95°C
Relative Humidity (non-condensing)	≤ 85%
Altitude	≤ 2000m
Regulation	
Environment	IP67, IEC60068, CNS15454
Emission	IEC 1000/IEC 801-2,3,4/IEC 255-4
Communication	
Interface	CAN BUS/Enable control
Protection	
Input Protection	Surge protection Short circuit protection Over voltage protection Under voltage protection Input Fuse over current protection
Output Protection	Short circuit protection Over load protection Reverse priority protection Over voltage protection Over temperature protection Current limit protection Output fuse over current protection


Dimensions
